


"Experience the Quality"

AMARR® CLASSICA® COLLECTION



Looks can be deceiving. From a distance, you see wood. Up close, it's sturdy, durable, low-maintenance steel. The Amarr® Classica® Collection of Carriage House Doors. Precision-shaped doors in fresh, clean, classic carriage house styles that go up and down like traditional garage doors. Three-section tall designs, instead of four, help deliver a more authentic carriage house look. Deception never looked so good.



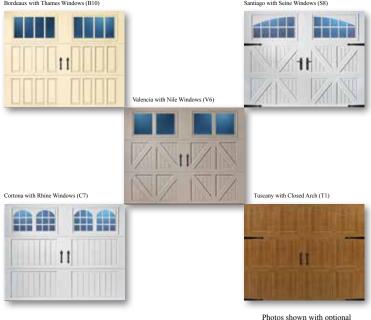


DESIGNS
















decorative hardware or locks.

AMARR® CLASSICA® COLLECTION

LUCERN







CLOSED SQUARE (L2)



mm mm ZH. /11





VALENCIA



11

CLOSED ARCH (V1)
















SANTIAGO



CLOSED SQUARE (S2)

/11 /

/11

818 B18

/11





















TRELLIS (S76)

TUSCANY





CLOSED ARCH (T1)





- 11

11

CLOSED SQUARE (T2)













Decorative Hardware











NORTHAMPTON







CLOSED ARCH (N1) CLOSED SQUARE (N2)

























CORTONA



CLOSED SQUARE (C2)











CLOSED DOUBLE ARCH



CONSTRUCTION



2000

Double-Layer: Steel + Insulation

Heavy-Duty Exterior Steel

- Durable, Reliable, Low Maintenance
- Environmentally Safe Polystyrene Thermal Insulation with Vinyl Backing
- Energy Efficient
- Quiet Operation
- R-Value: 6.64

3000




Environmentally Safe Polyurethane Thermal Insulation

Superior Energy Efficient Extra Quiet Operation

Bottom Steel Weather Seal R-Value: 13.35

GLASS OPTIONS




1/8" Tempered double strength glass. Insulated glass available in Clear, Frost and Dark Tint.



Flush with windows Flush without windows and Full View options available in 3000 Series

WINDOWS



















Specification	AMARR® CLASSICA® Series 2000	AMARR® CLASSICA® Series 3000
PANEL DESIGNS		
Carriage House	7 Designs	7 Designs & Flush
INSULATION	Polystyrene ¹	Polyurethane
U-FACTOR	.32	.22
R-VALUE ²	6.64	13.35
DOOR THICKNESS	2" (5.1cm)	2" (5.1cm)
STEEL THICKNESS	24 ga	25/27 ga
WINDOW GLASS OPTIONS		
1/8" Tempered Double Strength	•	•
Insulated Glass Options		•
WIND LOAD AVAILABLE ³	•	•
WARRANTY ⁴		
Paint Finish	Lifetime	Lifetime
Hardware	5 Years	Lifetime



² Calculated door section R-Value is in accordance with DASMA TDS-163 ³ It is your responsibility to make sure your garage door meets local building ⁴ For complete warranty details, visit deldenmfg.com or contact your local Delden dealer



"Experience the Quality"

KANSAS CITY, MO www.DeldenMfg.com ©2023 Rev 10/20

Your Local Delden Dealer:

Delden reserves the right to change specifications and designs without notice and without incurring obligations. Some graphics and details provided courtesy of Amarr and used by permission.



